

ACCESSORY SETUP INSTRUCTION

HEATED PASSENGER SEAT ASSY -- PN 5HY0-805200-1000

VALID FOR: MY2019 and Newer UFORCE 1000 UTVs


BEFORE YOU BEGIN: Read and understand the instructions before starting any work. Make sure that all parts are ready and that you have all the tools required for assembly.


NOTE: CFMOTO shall not be liable for any damage caused by incorrect assembly. CFMOTO recommends that all original accessories be assembled by an authorized CFMOTO dealer.

Before assembly, park the vehicle on a flat surface, put the transmission gear into Park (P) and turn off the key switch.

Zhejiang CFMOTO Power Co., Ltd. All rights reserved. Reproduction of this document, even in part, as well as copying of all kinds, is permitted only with the express written permission of the copyright owner.

MEANING OF SYMBOLS

 - Indicates information with more details or tips.

 - Indicates information of warning or danger.

PARTS LIST:

ITEM	PART NAME	PART NUMBER	QTY.	REMARK
1	HEATED PASSENGER SEAT ASSY	5HY0-805200-1000	1	The image below is not the final product.
2	HEATED PASSENGER SEAT	5HY0-132000-30000	1	
3	BRACKET, HEATING SWITCH	5HY0-130001	1	
4	SEAT HEATING SWITCH	5HY0-136000	1	
5	SELF-TAPPING SCREW ST4.8×13	30110-480130010	3	
6	TIE BAND	8010-150003	1	




TOOL LIST:

ITEM	DESCRIPTION	QTY.	REMARK
1	PROTECTIVE GLOVES	1	Recommended tools
2	CUTTER	1	


ASSEMBLY and INSTALLATION



// Remove the original passenger seat (A).

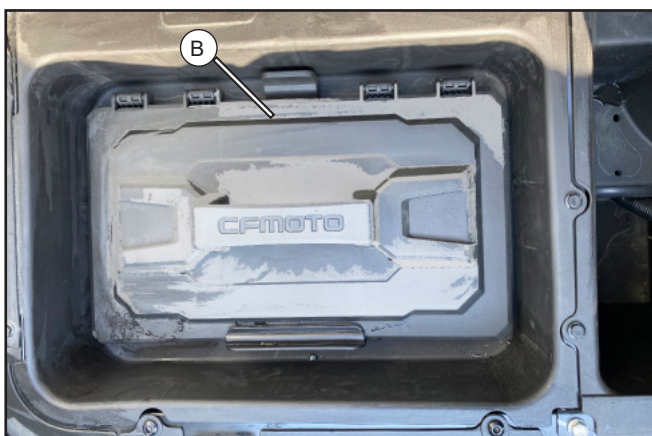


// Take out the tool box (B).

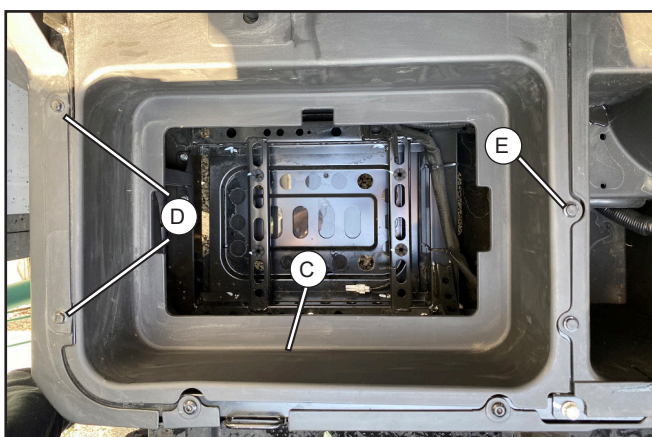


// Remove the bolts (D) and plastic clips (E), and then take out the seat right lower guard (C).



// At the front of the lower deco panel, use a cutting tool to remove the cut-out (F) as shown under the seat. Use extreme caution to prevent damage to the surrounding plastic.

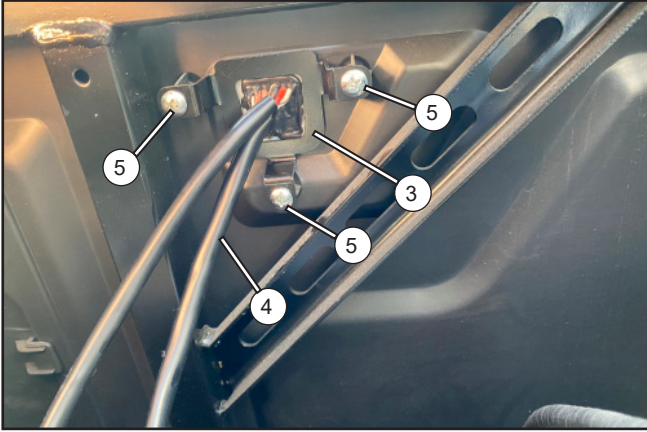
ASSEMBLY and INSTALLATION


// Place the seat heating switch (4) into the opening made under the seat, then secure it with the heating switch bracket (3) and self-tapping screws (5).

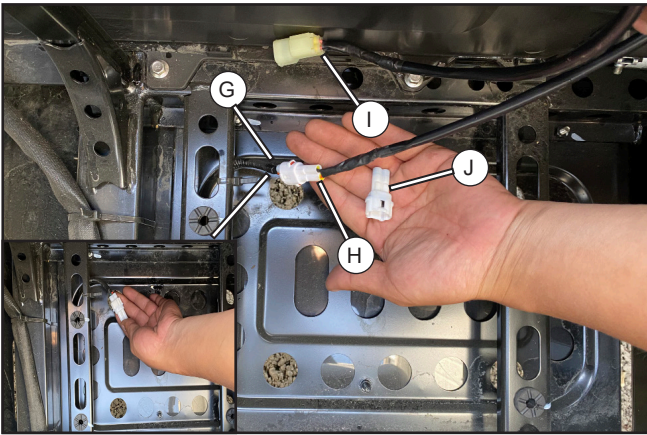

// Connect the reserved cable port (G) of the vehicle with the port (H) of the seat heating switch.

i (I) is the seat connection port, (J) is the plug of (H) port.

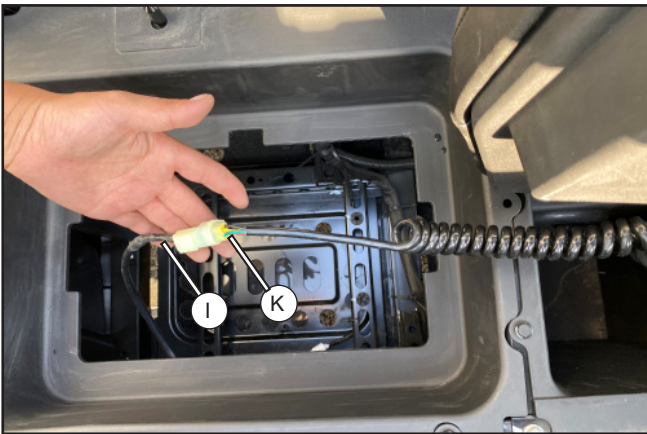


// Connect the seat connection port (I) to the heated seat port (K).



// Secure the cable of the seat heating switch to the frame with a tie band (6).

ASSEMBLY and INSTALLATION

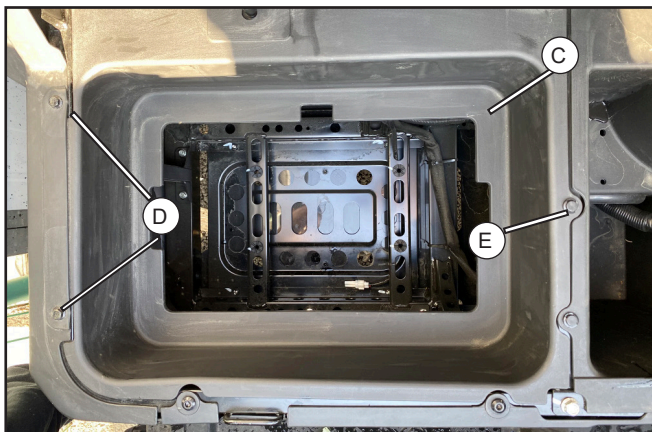

// Install the seat right lower guard (C) back to its original position with bolts (D) and plastic clips (E).



// Return the tool box (B) to its original position.

i Please route the cable of the seat as shown in the picture.



// Install the heated passenger seat (2).